

## HD-VIS-04 Hybrid Video Intercom Bundle



- Hybrid video intercom bundle for villa or house
- Convenient Hik-Connect App mobile control
- Stores messages and captured pictures in the TF card
- Including: DS-KB2411T-IM × 1, DS-KH6320-WTE1 × 1, 5-meter 4-wire cable
- Power adapter included in the package

## Specification

Door station	
Resolution	1920 × 1080
FOV	Horizontal: 66.2° Vertical: 37.2°
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
I/O output	1 relay output
Four-wire	1 for 4-wire interface
Power supply	12 VDC
Power consumption	Max. 5 W
Working temperature	-10°C to 55°C (14°F to 131°F)
Working humidity	10% to 90%
Dimensions	135.14 mm × 49.6 mm × 41.93 mm (5.32" × 1.95" × 1.65")
Indoor station	
System parameters	
Operation system	Embedded Linux operation system
RAM	128 MB
ROM	32 MB
Display parameters	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Audio parameters	
Audio input	Built-in 1*omnidirectional microphone
Audio output	Built-in 1*loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Network parameters	
Wired network	10/100 Mbps self-adaptive
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Protocol	TCP/IP, SIP, RTSP



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel




hikvisionhq

Device capacity	
Linked IPC capacity	16
Notice capacity	200
Linked indoor extensions	0
Linked doorphone capacity	2 analog doorphones, 17 IP doorphones Max
Device interface	
RS-485	1
Alarm input	2-ch alarm inputs
TF card	Max to 124 G, SD 2.0 or lower version
Alarm input	2
Alarm output	2
Four-wire interface	2
General	
Power consumption	≤ 6 W
Power supply	IEEE802.3af, Standard PoE,12VDC
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 23.6 mm (7.9" × 5.5" × 0.9")
Weight	With package: 365 g (0.8 lb) Without package: 355 g(0.78 lb)
Installation	Surface mounting
Application environment	Indoor

## ▪ Available Model

HD-VIS-04

## ▪ Dimensions

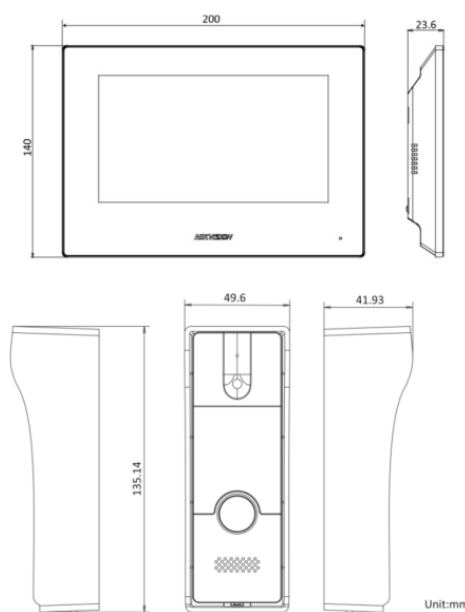

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998

Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq