

IP-VIS-PRO(-W) Network Video Intercom Bundle



- Network video intercom bundle for villa or house
- One call button for easier calls
- Convenient Hik-Connect App mobile control
- Stores messages and captured pictures in the TF card
- Including: DS-KV8113-WME1(C) × 1, DS-KH6320-WTE1 × 1, 4-port standard PoE switch × 1, 16 GB TF card × 1
- Power adapter included in the package

Specification

Door station	
System parameters	
Operation system	Embedded Linux operation system
Flash	32 M
RAM	256 M
Video parameters	
Supplement light	IR supplement
Resolution	Main stream : 1920 × 1080 Sub stream : 640 × 480
Lens	1
WDR	Support
FOV	Horizontal: 124° Vertical: 75°
Video compression standard	H.264
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker (more than 80 dB within 30 cm)
Volume adjustment	Adjustable
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Audio intercom	Two-way audio communication
Capacity parameters	
User capacity	2000
Network parameters	
Network protocol	TCP/IP, RTSP
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	Wi-Fi 802.11 b/g/n
3G/4G	/
Bluetooth	/



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

Device interface	
Network interface	1
RS-485	1
Wiegand	0
Alarm input	4
Lock control	2
Exit button	2 Max.
Door contact	2
Alarm output	0
Power interface	1
TAMPER	1
USB interface	0
TF card	1 (reserved)
General	
Button	1
Indicator	3
Power consumption	< 10 W
Working temperature	-40° C to 53° C(-40° F to 127.4° F)
Power supply	Standard PoE/12 VDC
Power consumption	< 10 W
Working humidity	10% to 95%
Dimension	174 mm × 91 mm × 29 mm
Protection level	IP65, IK08
Application environment	Outdoor
Weight	380 g
Installation	Surface Mounting
Indicator	3
Power supply	IEEE802.3af, standard PoE 12 VDC
Indoor station	
System parameters	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

Display parameters	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Network parameters	
Wired network	10/100 Mbps self-adaptive
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
Device interface	
RS-485	1
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Max to 32 G, SD 2.0 or lower version
General	
Power consumption	≤ 6 W
Power supply	Standard PoE,12VDC
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

▪ Available Model

IP-VIS-PRO

IP-VIS-PRO-W




Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



▪ Dimension

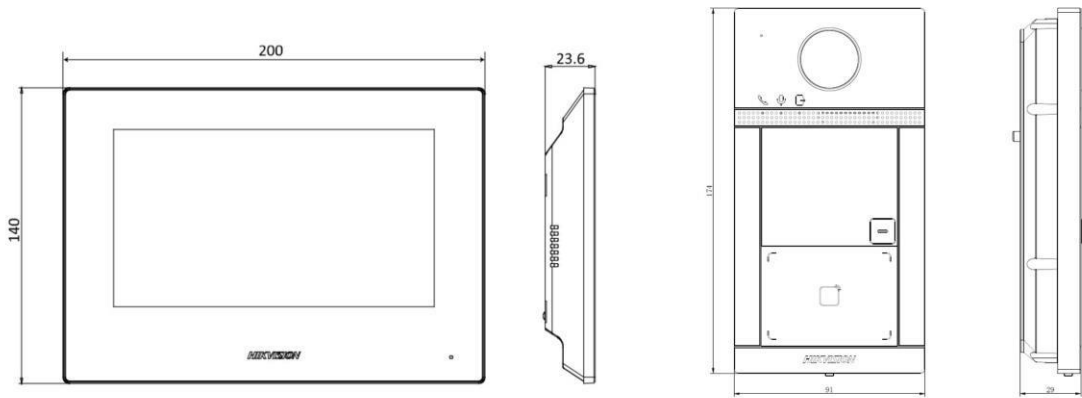

Unit: mm



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq