

## IP-VIS-SLIM(-W) Network Video Intercom Bundle



- IP video intercom bundle for villa or house
- One call button for easier calls
- Convenient Hik-Connect App mobile control
- Including: DS-KV6113-WPE1(C) × 1, DS-KH6320-WTE1 × 1
- Power adapter included in the package

## · Specification

Door station	
System parameters	
Operation system	Embedded Linux operation system
Flash	32 M
RAM	256 M
Video parameters	
Camera	2MP HD camera
Supplement light	Low illumination IR supplement mode: 3m
Backlight compensation	Support
Digital noise reduction	Support
WDR	True WDR
FOV	Horizontal: 124° Vertical: 75°
Video compression standard	H.264
Resolution	Main stream : 1920@30fps, 720p@25fps Sub stream : D1@25fps
Motion detection	Support
Flash-avoid frequency	50 Hz, 60 Hz
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Audio intercom	Two-way audio communication
Network parameters	
Network protocol	TCP/IP, RTSP
Wired network	10/100 Mbps self-adaptive Ethernet



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

Device interface	
RS-485	1
Alarm input	4
Debugging port	1
Grounding	1
TAMPER switch	1
General	
Power consumption	< 10 W
Working temperature	-40° C to 53° C(-40° F to 127.4° F)
Power supply	Standard PoE/12 VDC
Working humidity	10% to 95%
Dimension	174 mm × 91 mm × 29 mm
Installation	Surface Mounting
Protection level	IP65
Application environment	Outdoor
Indicator	2
Power supply	IEEE802.3af, standard PoE 12 VDC



#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

Indoor station	
System parameters	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
Display parameters	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Network parameters	
Wired network	10/100 Mbps self-adaptive
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
Device interface	
RS-485	1
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Max to 32 G, SD 2.0 or lower version
General	
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

### ▪ Available Model

IP-VIS-SLIM

IP-CIS-SLIM-W



#### Headquarters

No.555 Qianmo Road, Binjiang District,

Hangzhou 310051, China


T +86-571-8807-5998

Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



## ▪ Dimension

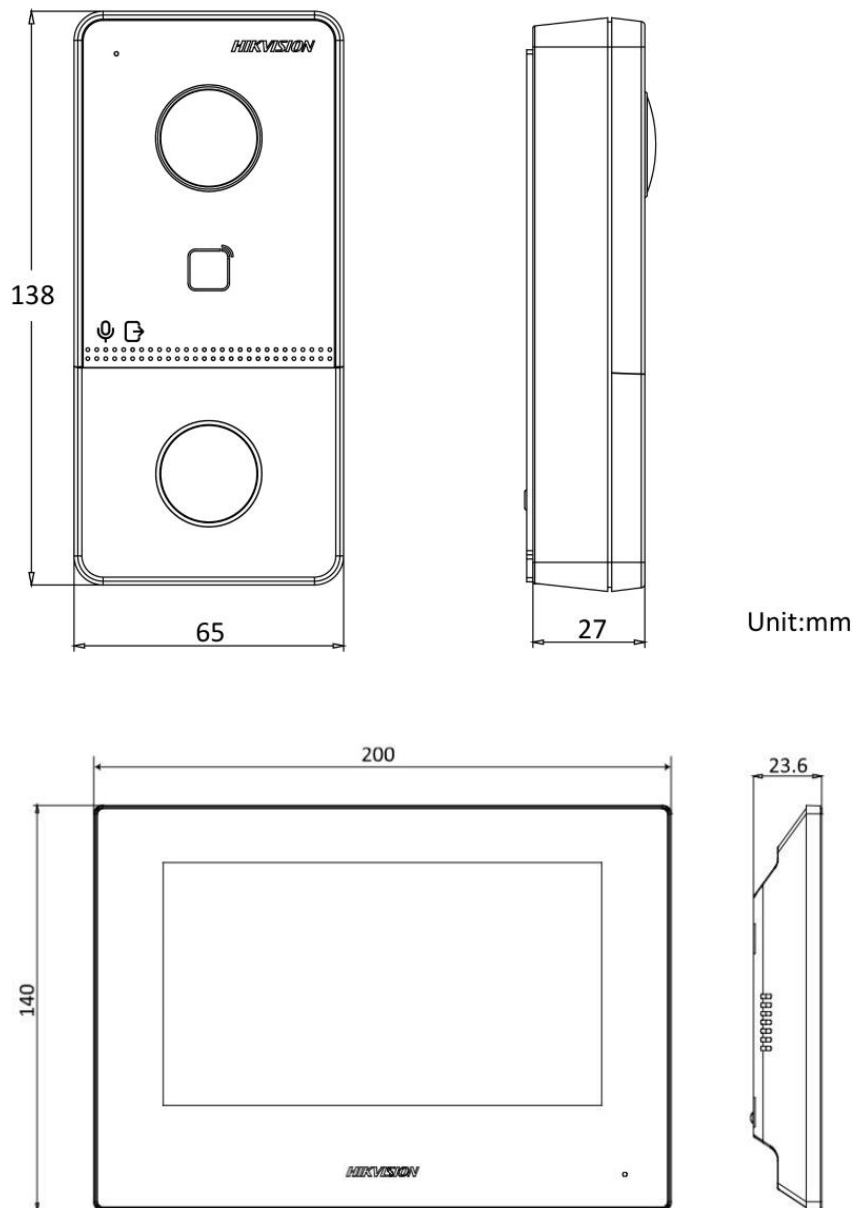

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq