

L-VIS-04

## Four-Wire Analog Video Intercom Bundle



- 4-wire analog video intercom bundle for villa or house
- One call button for easier calls
- Including: DS-KB2411T-IM × 1, DS-KH2220 × 1, 5-meter 4-wire cable, and other accessories
- European power supply adaptor included

## ▪ Specification

Video parameters	
Resolution	Main stream : 1920 × 1080 Sub stream : 960 × 576
Lens	1/2.7" CMOS
FOV	Horizontal: 66.2° Vertical: 37.2°
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Device interface	
I/O output	1 relay output
Four-wire	1 four-wire interface(1-ch video input, 1-ch audio input/output, 1-ch power supply, 1-ch grounding)
General	
Power supply	12 VDC
Power consumption	Max. 5W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Indoor station	
Display parameters	
Operation method	Physical button
Type	7-inch colorful TFT LCD
Resolution	800 × 480
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
General	
Power supply	12 VDC
Power consumption	≤5 W
Working temperature	-10° C to 55° C(14° F to 131° F)
Working humidity	10% to 90%
Dimension	195.8 mm × 132.8 mm × 18.39 mm

## ▪ Available Model

L-VIS-04



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global




Hikvision  
Corporate Channel



hikvisionhq

## ▪ Dimensions

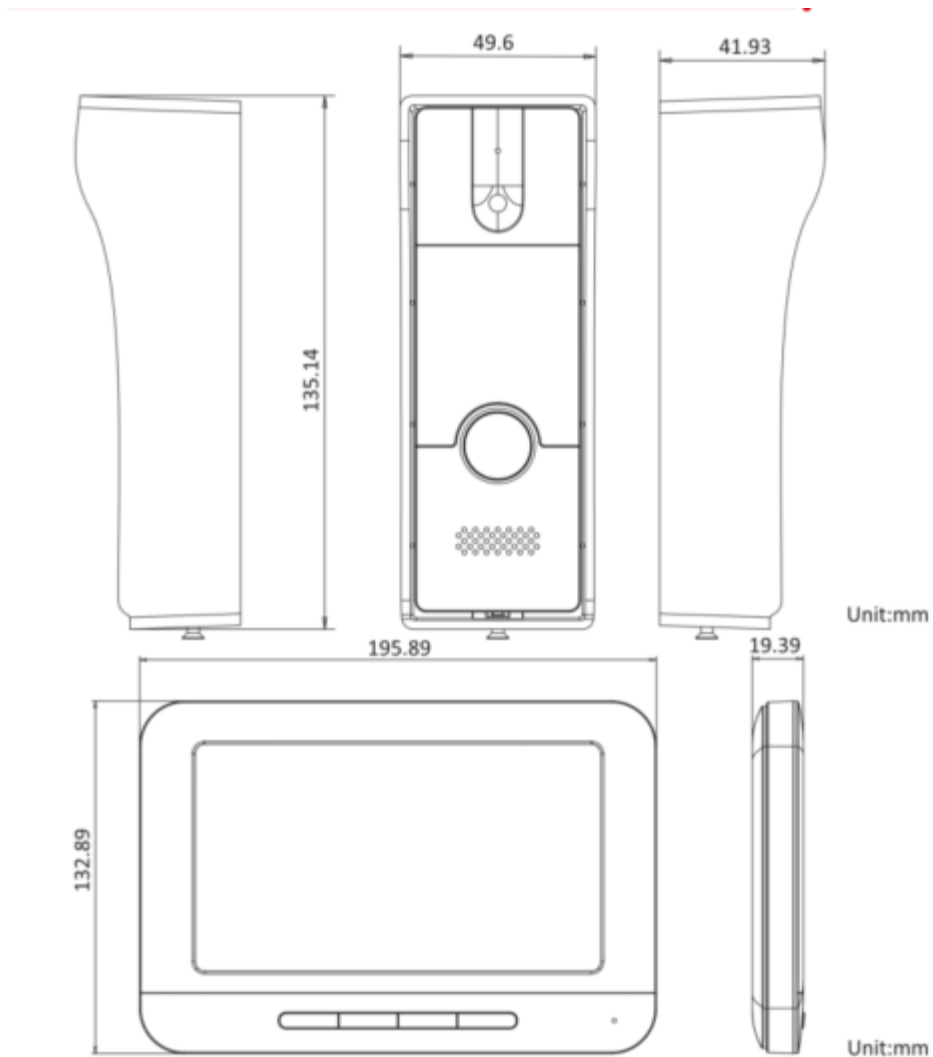

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq